
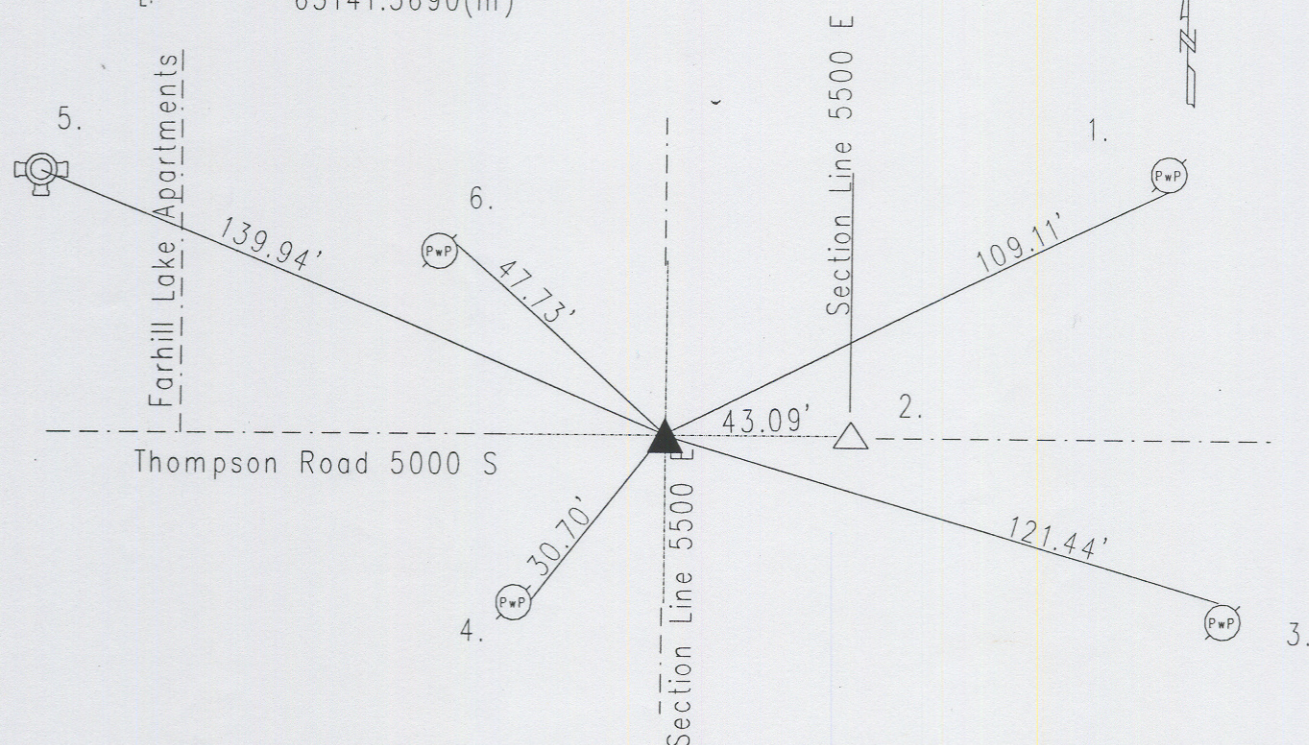


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 3 TOWNSHIP 14 RANGE 4  
DATE: -3-10-01- 10-04-06  
PARTY CHIEF: --Whiteside-- -Kiste Kiste  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 4-17-96

IN. S.P.C. E ZONE, NAD 83  
NAME: 14040302  
N: 493702.1280(m)  
E: 65141.3690(m)

Thompson Road 5000 S

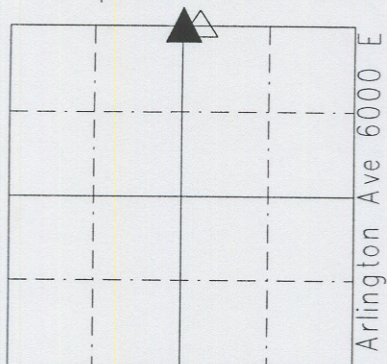

Original post set 1820 by Hendricks with witness: 9" elm S 58 E 24 links;  
10" beech N 45 W 11 links per Marion County Atlas pg. 10. 3-1851 called witnesses:  
22" beech N 45 W 11 links, 8" sugar maple S 36 W 43 links per Franklin Township  
Legal Survey Book pg. 4. Hosbrook 6-4-1849 called stone set; witness trees  
still standing per Franklin Township Legal Survey Book pg. 16. Reference (no date)  
called double corner lying 42' W. 4-22-43 called double lying 42.9' W. 10-5-64  
called pipe set over stone. Reference (no date) called PK nail in aluminum disk  
at surface. Cripe NOTE: double corner lying 42.9' W of Title corner. Excavated  
8-1-86 and 1" iron pipe found over stone. Harrison set. Re-tied 4-17-96 by Kiste.  
Re-tied 3-10-01 by Whiteside.

14040302

REF.	DISTANCE	DESCRIPTION
1.	109.11'	Road nail S PwP#1-705A 18"up
2.	43.09'	Due E to S Q 34-15-4 (PK nail at surface).
3.	121.44'	PK nail N PwP#30-705B 14"up
4.	30.70'	PK nail E PwP#573-704B 4"up
5.	139.94'	Top nut of fire hydrant
6.	47.73'	PK nail E PwP#461-704A 6"up